



# PAN CONVEYORS



## CONTENTS

- 
- 2** AUMUND Pan Conveyors

---

  - 4** Pan Conveyor with Deep Drawn Pans Type KZB

---

  - 8** Pan Conveyor with Deep Drawn Pans and Baffles Type KZB-Q

---

  - 10** Pan Conveyor with Buckets Type BZB

---

  - 14** Pivoting Pan Conveyor Type SPB

---

  - 18** Reversible Deep-Drawn Pan Conveyor Type KZB-R

---

  - 19** Silo Discharge Type SAK

---

  - 20** Components Chain Technology

---

  - 21** Accessories

---

  - 22** Conversions and Refurbishments

---

  - 23** After-Sales Services

## AUMUND Pan Conveyors

**Technology with proven quality, strength and reliability**

**AUMUND Pan Conveyors are designed to suit efficiency driven process technologies and to ensure system performance.**

At AUMUND we know that trouble-free operation of the conveying equipment is vital for the productivity and profitability of the whole plant. Keeping in mind this objective we are committed to our high quality standards which are reflected in the exceptional service life of the AUMUND Pan Conveyor.

Our focus is to satisfy specific requirements with creative, cost-effective solutions for the transport of the whole range of bulk materials in cement production from limestone, cement and additives to hot and abrasive cement clinker.

With 85 years in industrial engineering of conveying equipment we also assist customers worldwide with conceptual layouts and configuration. Our primary goal is to identify and provide the most efficient and economic conveying routes.

- **For the whole range of bulk materials in cement production**
- **Engineered to suit plant and operator needs**
- **High quality standards**
- **Outstanding service life**
- **Efficient and economic conveying routes**









Conveying route with Pan Conveyor KZB

## PAN CONVEYOR WITH DEEP DRAWN PANS TYPE KZB


The Pan Conveyor with deep drawn pans type KZB is designed to suit slopes matching the angle of repose of the conveyed bulk material.

For clinker handling the Pan Conveyor type KZB suits conveying routes with an inclination up to 30°.

This Pan Conveyor type is the ideal direct connection between cooler and clinker stock especially for applications with grate coolers. The design allows the Pan Conveyor to be arranged underneath the whole cooler length and to collect the fines from the dust collecting hoppers same as the clinker from the crusher.

Installed underneath the clinker stock in combination with the AUMUND Silo Discharge Gate, the Pan Conveyor with deep drawn pans Type KZB allows for dust-controlled clinker reclaim.

- **Designed for conveying routes with up to 30° inclination**
- **Conveying heights exceeding 75 m**
- **Conveying capacities exceeding 1,000 t/h**
- **Chains with 290 to 3,000 kN breaking load per strand**

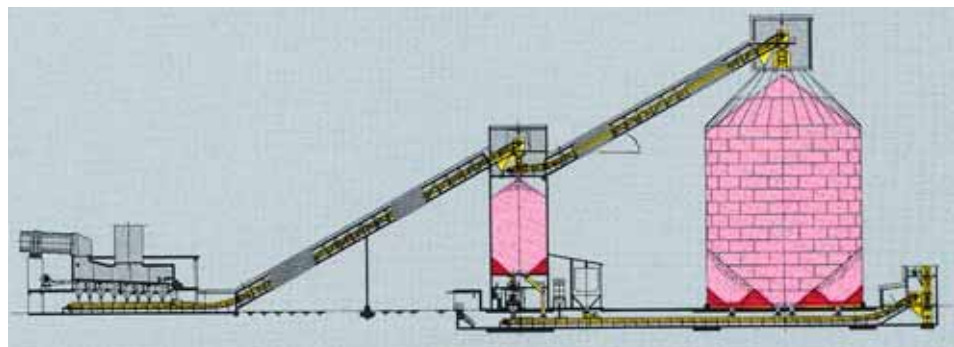

Deep Drawn Pan Conveyor under Clinker Cooler



## FEATURES

- Accepts temperatures to 700°C
- Designed as a modular structure with standard components
- Profiled pans for high rigidity
- Minimum spillage
- Highly wear resistant chains with high yield strength
- High quality standards on all components

## BENEFITS

- Efficient and reliable operation
- Reduced installation time
- Low operating costs
- Minimum and easy maintenance
- Low power consumption
- Low overall investment cost
- Outstanding service life





Pan Conveyor with Deep Drawn Pans Type KZB



Pan Conveyor type KZB - Detail



Deep-Drawn Pan Conveyor - Detail

The characteristic profile of the pans with their contact-free overlapping offers high rigidity with large pan widths and a closed surface in the return stations. Stiffeners pressed into the side plates combined with a sealing edge of special design provide the tight fitting to avoid spillage.

The range of AUMUND conveyor chains covers a large range of applications, from small capacities and horizontal conveying routes to high capacities and lifts.

The chain - for single or double strand application - is chosen to suit the actual traction force while the roller size is chosen in accordance with the weight of the pan conveyor itself and the conveyed material.

The drive units feature bevel spur gears either foot mounted with flexible coupling or shaft-mounted. For inclined conveying, the gear box is fitted with a back stop or, alternatively, a flexible coupling with brake is arranged between gear box and motor.

The coupling between motor and gear box can be hydraulic or flexible for soft start-up. Frequency converters adapt the conveying speed to the actual conveying capacity.

Conveyor section type KZB		Theoretical conveying capacity m <sup>3</sup> /h					
Width mm	Side wall height mm	Conveyor speed m /s					
		0,1	0,15	0,2	0,25	0,3	0,35
400	100	11	17	23	29	34	40
400	150	19	28	37	47	56	65
400	200	26	39	52	65	78	91
400	250	33	50	66	83	99	116
400	300	40	60	81	101	121	141
600	150	28	42	56	70	84	98
600	200	39	58	78	97	116	136
600	250	50	74	99	124	149	174
600	300	60	91	121	151	181	211
600	350	71	107	142	178	214	249
800	200	52	78	104	129	155	181
800	250	66	99	132	165	198	232
800	300	81	121	161	201	242	282
800	350	95	142	190	237	285	332
800	400	109	164	219	273	328	383
1000	200	65	97	129	162	194	226
1000	250	83	124	165	207	248	289
1000	300	101	151	201	252	302	352
1000	350	119	178	237	297	356	415
1000	400	137	205	273	342	410	478
1200	200	78	116	155	194	233	272
1200	250	99	149	198	248	298	347
1200	300	121	181	242	302	363	423
1200	350	142	214	285	356	427	499
1200	400	164	246	328	410	492	574
1400	250	116	174	232	289	347	405
1400	300	141	211	282	352	423	493
1400	350	166	249	332	415	499	582
1400	400	191	287	383	478	574	670
1600	250	132	198	265	331	397	463
1600	300	161	242	322	403	483	564
1600	350	190	285	380	475	570	665
1600	400	219	328	437	547	656	766
1600	450	248	371	495	619	743	866
1800	250	149	223	298	372	447	521
1800	300	181	272	363	453	544	634
1800	350	214	321	427	534	641	748
1800	400	246	369	492	615	738	861
1800	450	278	418	557	696	835	975
2000	250	165	248	331	414	496	579
2000	300	201	302	403	504	604	705
2000	350	237	356	475	594	712	831
2000	400	273	410	547	684	820	957
2000	450	309	464	619	774	928	1083
2200	250	182	273	364	455	546	637
2200	300	222	332	443	554	665	775
2200	350	261	392	522	653	783	914
2200	400	301	451	602	752	902	1053
2200	450	340	511	681	851	1021	1191
2400	250	198	298	397	496	595	695
2400	300	242	363	483	604	725	846
2400	350	285	427	570	712	855	997
2400	400	328	492	656	820	984	1148
2400	450	371	557	743	928	1114	1300





Pan Conveyor KZB-Q connecting cooler and silo

## **PAN CONVEYOR WITH DEEP DRAWN PANS AND BAFFLES TYPE KZB-Q**

- **Designed for conveying routes with up to 45° inclination**
- **Conveying heights to 78 m**
- **Conveying capacities to 700 t/h**
- **Chains with 290 to 3,000 kN breaking load per strand**



KZB-Q inclined at 45 degrees



For slopes exceeding 30 degrees retainer baffles are fitted to the deep drawn pans. These baffles are welded to the bottom plate and held in a loose fitting by cams which are pressed into the upper part of the side boards. The loose fitting allows the baffles to bend in case foreign bodies get onto the conveyor.

All further parts of the KZB-Q are interchangeable with the KZB. These standardized components constitute the AUMUND modular system for easy field assembly and interchangeability, an important asset for spare parts administration.



Deep Drawn Pans with Baffles

Conveyor section type KZB-Q		Theoretical conveying capacity m <sup>3</sup> /h					
Width mm	Side wall height mm	Conveyor speed m /s					
		0,1	0,15	0,2	0,25	0,3	0,35
400	250	33	50	66	83	99	116
400	300	40	60	81	101	121	141
400	350	47	71	95	119	142	166
400	400	55	82	109	137	164	191
600	250	50	74	99	124	149	174
600	300	60	91	121	151	181	211
600	350	71	107	142	178	214	249
600	400	82	123	164	205	246	287
800	250	66	99	132	165	198	232
800	300	81	121	161	201	242	282
800	350	95	142	190	237	285	332
800	400	109	164	219	273	328	383
800	450	124	186	248	309	371	433
1000	250	83	124	165	207	248	289
1000	300	101	151	201	252	302	352
1000	350	119	178	237	297	356	415
1000	400	137	205	273	342	410	478
1000	450	155	232	309	387	464	541
1200	250	99	149	198	248	298	347
1200	300	121	181	242	302	363	423
1200	350	142	214	285	356	427	499
1200	400	164	246	328	410	492	574
1200	450	186	278	371	464	557	650
1400	250	116	174	232	289	347	405
1400	300	141	211	282	352	423	493
1400	350	166	249	332	415	499	582
1400	400	191	287	383	478	574	670
1400	450	217	325	433	541	650	758
1600	300	161	242	322	403	483	564
1600	350	190	285	380	475	570	665
1600	400	219	328	437	547	656	766
1600	450	248	371	495	619	743	866
1800	300	181	272	363	453	544	634
1800	350	214	321	427	534	641	748
1800	400	246	369	492	615	738	861
1800	450	278	418	557	696	835	975
2000	300	201	302	403	504	604	705
2000	350	237	356	475	594	712	831
2000	400	273	410	547	684	820	957
2000	450	309	464	619	774	928	1083
2200	300	222	332	443	554	665	775
2200	350	261	392	522	653	783	914
2200	400	301	451	602	752	902	1053
2200	450	340	511	681	851	1021	1191
2400	300	242	363	483	604	725	846
2400	350	285	427	570	712	855	997
2400	400	328	492	656	820	984	1148
2400	450	371	557	743	928	1114	1300



Feeding of covered stockpile

## PAN CONVEYOR WITH BUCKETS TYPE BZB

- **Designed for conveying routes with up to 60° inclination**
- **Conveying heights to 96 m**
- **Conveying capacities to 500 t/h**
- **Chains with 290 to 3,000 kN breaking load per strand**

Wherever conveying of clinker with a high content of fines is required, the Bucket Conveyor type BZB is the most appropriate choice. The bucket design with either forward or backward overlapping is designed to suit this particular application and minimizes spillage and cleaning.

Designed for conveying at an inclination up to 60 degrees, the Bucket Conveyor fits into layouts combining high elevation with restricted space. The narrow curve radius is a further feature to suit these applications where only limited space is available, a considerable advantage for modernization projects or conversion in existing plants.

Uniform bucket filling and even material distribution over the whole bucket width is ensured by expert planning of the feed chute system - a pre-requisite for trouble-free operation with minimum dust generation.



Bucket Apron Conveyor



Feeding of mill hoppers





Clinker Transport with Conveyor type BZB



Bucket Apron Conveyor type BZB Detail

<b>Conveying Capacities - Bucket Conveyor Type BZB</b>							
The capacities indicated correspond to a brimfull filling (water filling) =100 %							
Bucket		Theoretical conveying capacity m <sup>3</sup> / h					
Bucket mm	Side wall height mm	Conveyor speed m / s					
		0,1	0,15	0,2	0,25	0,3	0,35
400	200	21	31	42	52	62	73
400	250	27	40	54	67	81	94
600	200	31	47	62	78	94	109
600	250	40	60	81	101	121	141
600	300	49	74	99	123	148	172
800	250	54	81	107	134	161	188
800	300	66	99	131	164	197	230
800	350	78	117	155	194	233	272
800	400	90	135	179	224	269	314
1000	300	78	117	156	196	235	274
1000	350	92	138	184	230	277	323
1000	400	106	159	212	265	318	372
1200	350	111	166	221	277	332	387
1200	400	127	191	255	318	382	446
1400	350	129	194	258	323	387	452
1400	400	149	223	297	372	446	520
1600	350	148	221	295	369	443	516
1600	400	170	255	340	425	510	594

The bucket - standard widths to 1,600 mm - feature a built-in stiffener for high solidity.

Depending on the case of application the overlapping of the buckets is either forward or backward. With the tight bucket arrangement the BZB meets the criteria for proper feeding with minimum spillage.

The modular system also applies for the AUMUND Bucket Conveyor, ensuring interchangeability and combination with components like those used with the Deep Drawn Pan Conveyor.

## Features

- **Ideal for conveying of clinker with a high content of fines**
- **Narrow curve radius, down to 10 m**
- **Expert design of the feed chute system**
- **Designed as a modular structure with standard components**
- **Minimum spillage**
- **Highly wear resistant chains with high yield strength**
- **High quality standards on all components**

## Benefits

- **Efficient and reliable operation**
- **Suits applications with limited space**
- **Low operating costs**
- **Minimum and easy maintenance**
- **Outstanding service life**



Feeding two silos in line

## **PIVOTING PAN CONVEYOR TYPE SPB**

For bulk material distribution into a series of silos or hoppers, the Pivoting Pan Conveyor offers the most versatile arrangements.

The Pivoting Pan Conveyor ensures PLC controlled multiple distribution of various materials with just one conveyor.


- **Pan reversing system for simultaneous conveying on the upper and lower run**
- **Intermediate discharge stations placed at any given position**
- **Upper and lower run feeding**
- **Specific feeding and discharge features**

Feeding onto the upper run is performed with a standard feed chute whilst a two-way chute leads the bulk material to the lower run. Equipped with an overflow system the feed chutes also ensure direct discharge of the bulk material into the silo or hopper.

Intermediate discharge stations may be positioned where required and permit remote controlled switching from one discharge station to the other.

Bulk material directed onto the upper run can subsequently be transferred to the lower run through an intermediate discharge station located on the upper run. The material may then be distributed into clinker silos or mill hoppers through discharge stations on the lower run.



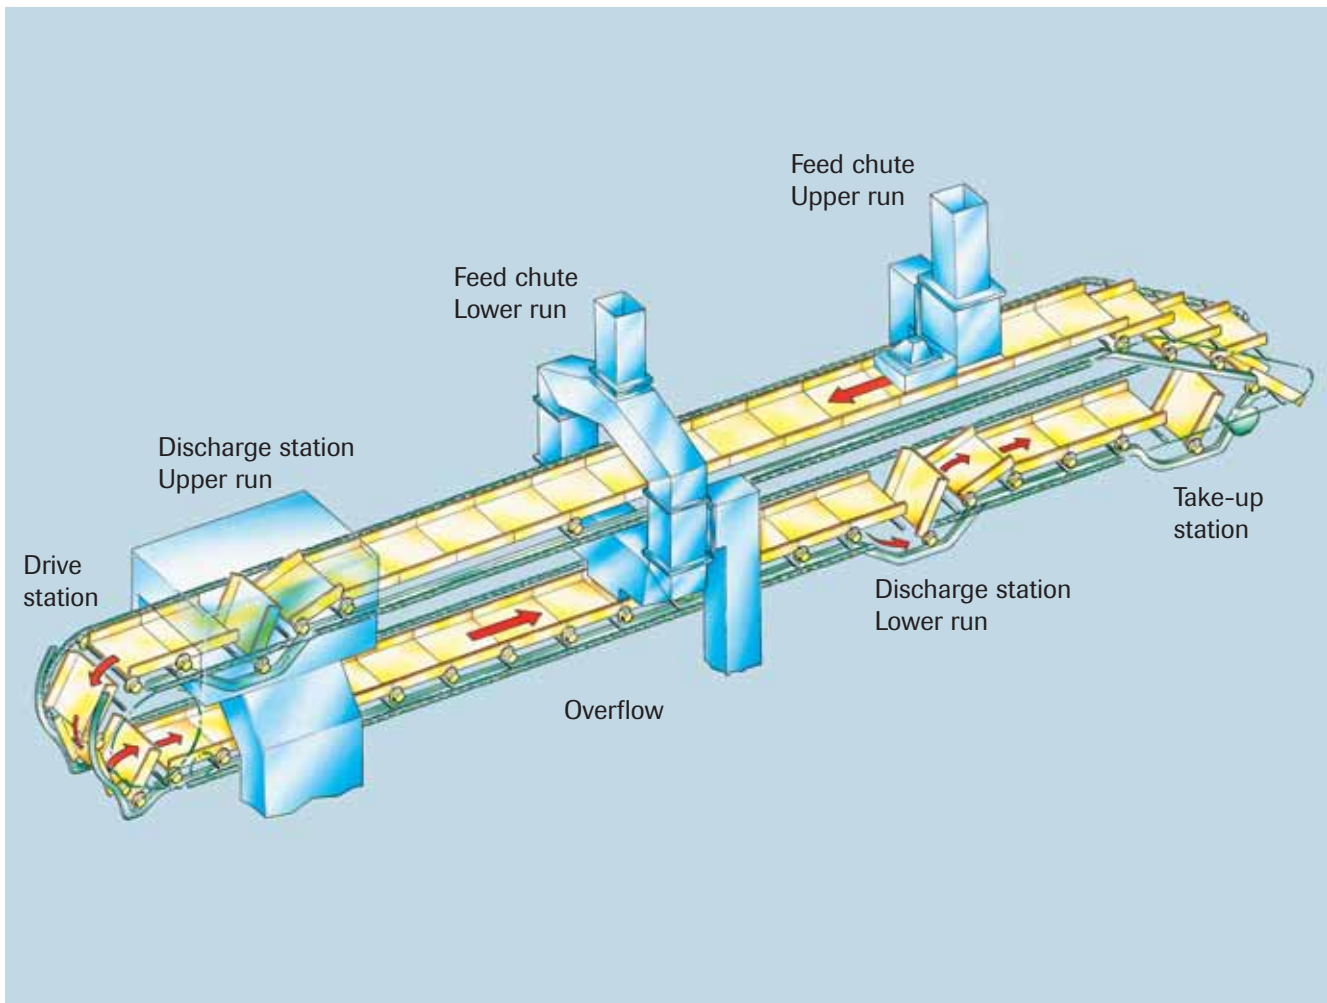


Upper and lower run feeding and discharge

Simultaneous conveying on the upper and the lower run is a further alternative. A hopper can thus be loaded with cement clinker by way of the lower run whilst for example gypsum is conveyed on the upper run.





Mill hopper feeding


### Bulk Material Distribution into Storage Halls



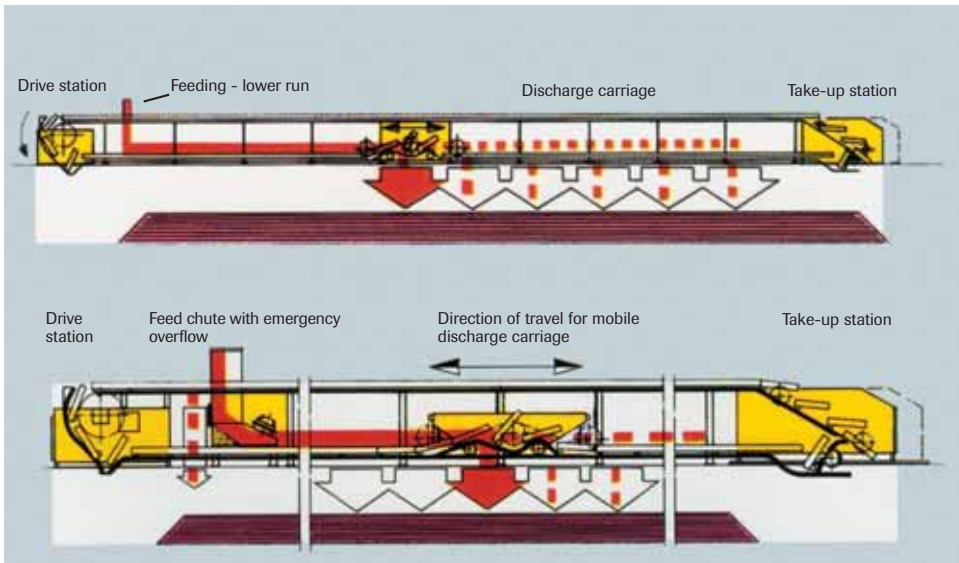


### Bulk Material Distribution into a Series of Silos

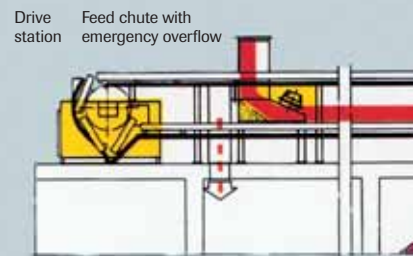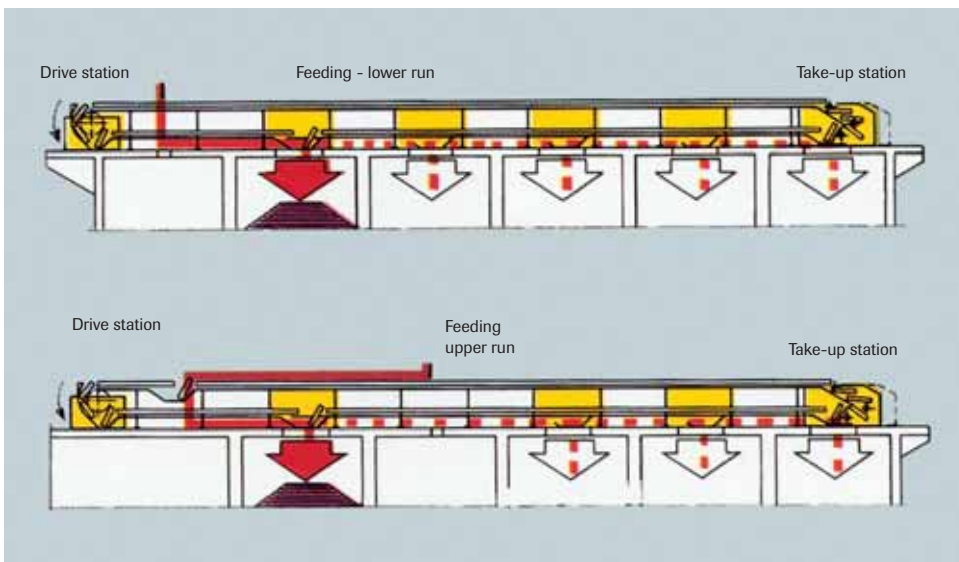

### Bulk Material Distribution into Silos and Storage Hall

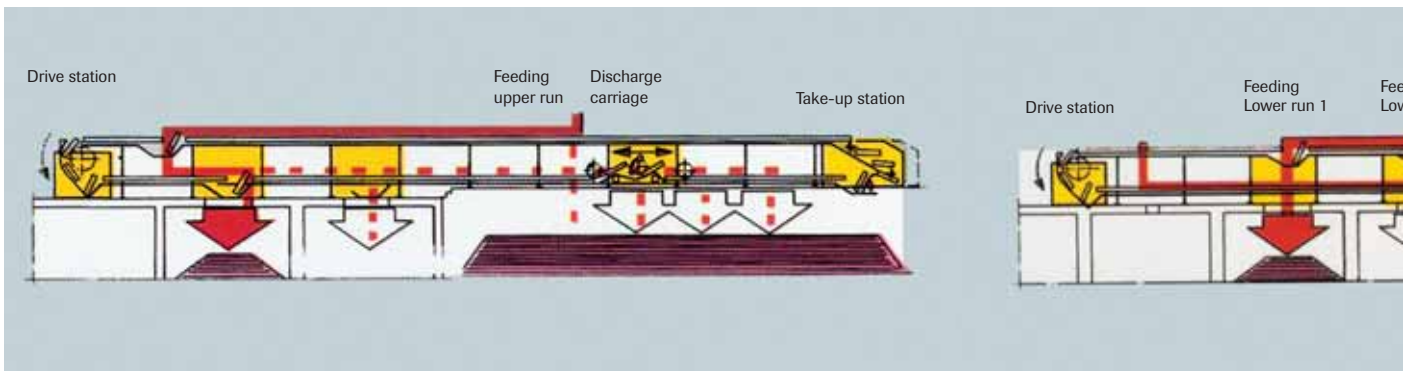


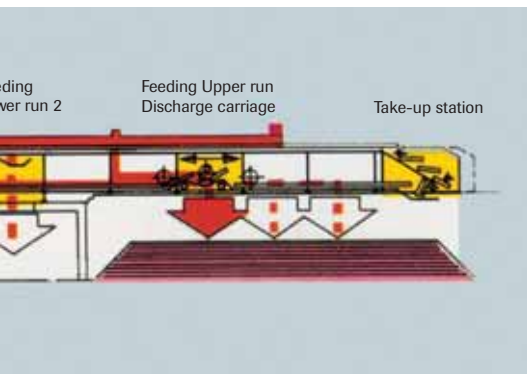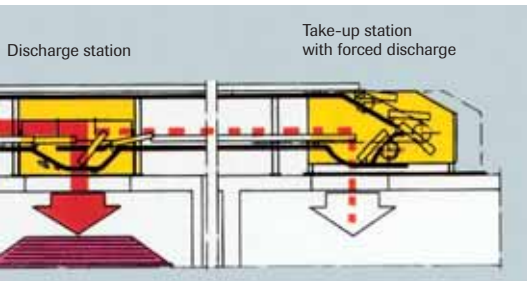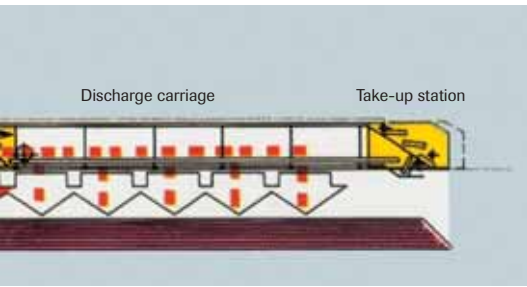

### Conveying capacity - Pivoting Pan Conveyor Type SPB

The capacities indicated correspond to a brimfull filling (water filling) =100 %

Conveyor section		Theoretical conveying capacity m <sup>3</sup> /h					Filling rate limit
Pan width Plw mm	Side wall height mm	Conveyor speed m /s					
		0.10	0.15	0.20	0.25	0.30	
400	150	22	32	43	54	65	115%
400	200	29	43	58	72	86	105%
600	150	32	49	65	81	97	120%
600	200	43	65	86	108	130	110%
800	150	43	65	86	108	130	125%
800	200	58	86	115	144	173	115%
1.000	150	54	81	108	135	162	130%
1.000	200	72	108	144	180	216	120%
1.200	150	65	97	130	162	194	135%
1.200	200	86	130	173	216	259	125%
1.400	150	76	113	151	189	227	140%
1.400	200	101	151	202	252	302	130%
1.600	150	86	130	173	216	259	140%
1.600	200	115	173	230	288	346	130%

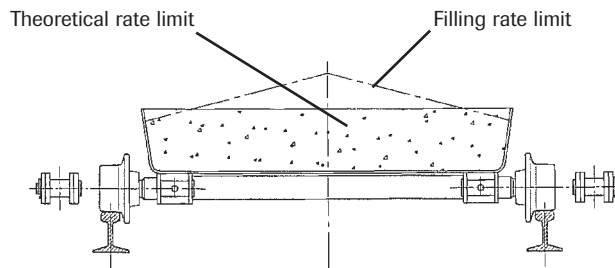

Feeding of long clinker storage halls requires continuous shifting of the discharge point. A mobile discharge carriage which can be moved to any given position above the hall is used with this particular application. The clinker is continuously distributed over the whole travel length of the carriage.

Sensors on the conveyor supports monitor the position of the travelling carriage. Level indicators control automatic shifting of the carriage as soon as a maximum filling level is reached inside the storage hall.

- **Automated feeding of clinker silos, mill hoppers and clinker halls**
- **Simultaneous conveying of different bulk materials**
- **PLC-controlled operation**
- **Automated material distribution controlled by level sensors**
- **Customized layout and planning**
- **Standardized components**






Clinker Silos 2 x 60,000 t

## REVERSIBLE DEEP-DRAWN PAN CONVEYOR TYPE KZB-R

For applications where conveying in both directions is required, the Deep Drawn Pan Conveyor may be converted into a reversible conveyor. Alternate feeding of two silos with just one conveyor is made possible by simply changing the conveying direction.

This conveyor of special design suits horizontal arrangements. The illustration shows a plant where feeding of two clinker silos is performed with one Bucket Elevator and one Reversible Conveyor. The Bucket Elevator unloads the clinker in the centre of the subsequent Reversible Conveyor which then feeds the clinker to either one of the silos.

Operation of the Reversible Conveyor is PLC control-

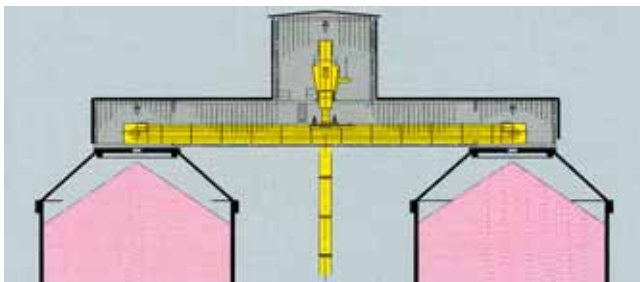


Clinker silo feeding with reversible pan conveyor

led from the central control room ensuring that the pans are cleared before shifting from one direction to reverse conveying.

To achieve this type of operation the pans are arranged such that the pan overlapping always points into the chosen conveying direction.

If required with a long centre distance, both conveyor ends are fitted with a drive unit.

- **Alternate feeding of two silos with one conveyor**
- **Conveying in both directions by simply shifting to reverse conveying**

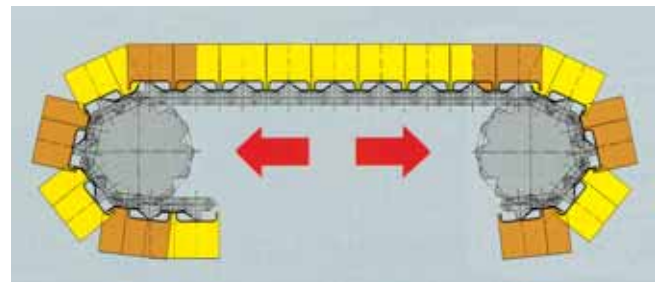

Reversible pan conveyor - functional principle



Silo Discharge with Remote Control

## SILO DISCHARGE TYPE SAK

For clinker silo discharge with low dust emission, for proportional addition of low-burnt or imported clinker AUMUND's product range includes the Gravity Discharge Unit operating in combination with the Deep Drawn Pan Conveyor. The height of the material layer on the pan conveyor determines the discharge rate and the feeding capacity onto the subsequent conveying equipment. Preset during commissioning, it is adjusted to the specific requirements of the plant.

With its built-in motorized shell gate the Gravity Discharge Unit prevents the clinker from falling in an uncontrolled manner onto the pan conveyor. It

reclaims the clinker at low speed and minimizes dust generation.

Where adequate, the Gravity Discharge Unit may also be manually operated.

For uniform discharge of the stored volume, a multitude of motorized Gravity Discharge Units are installed underneath the clinker silo. Switching between discharge points is made by remote control assisted by ultrasonic sensors detecting lack of clinker on the conveyor.



## COMPONENTS

AUMUND Pan Conveyors feature standardized components forming part of the modular system. Components of different pan conveyor types are interchangeable, a major advantage for spare parts management.

- Bogie-type rails ranging from size S14 to S30, chosen to suit the pan conveyor size
- Roller guide-rails in the curve area
- Standard roller design with tempered running surface and multiple sealing and life lubrication
- Drive and tail shaft sprockets with exchangeable toothed segments for easy replacement
- Sprockets with double tooth pitch meshing with the sprocket teeth only after each second turn for increase of lifetime
- Chains with breaking loads ranging from 290 kN to 3,000 kN



Type	for conveyor type	breaking load kN
AU3032.1	KZB	290
BAU3032.1	BZB	
AU4540.1	KZB	510
BAU4540.1	BZB	
AU5544.1	KZB	700
BAU5544.1	BZB	
AU6052.1	KZB	900
BAU6052.1	BZB	
AU6060.1	KZB	1200
BAU6060.1	BZB	
AU8076.1	KZB	1900
BAU8076.1	BZB	
AU9085.1	KZB	2350
BAU9085.1	BZB	
AU10090.1	KZB	3000
BAU10090.1	BZB	

Chain pitch 250mm

## CHAIN TECHNOLOGY

- High precision manufacturing technology
- Special, wear-resistant steel
- High yield strength

AUMUND chains for Pan Conveyors are fabricated from special steel suitable for accurate laser cutting. The high precision manufacturing technology combines high yield strength with perfect distribution of forces.

The chain features a divided chain locking link, so field assembly is simplified.





## ACCESSORIES

- **Two way distribution chute**
- **Three way distribution chute**
- **Motorized flat gate**
- **Maintenance trolley for conveyor bridge**

Remote control of downstream conveying directions is performed with the AUMUND two or three-way distribution chute. The chutes are fitted with shell gates actuated either by a gear motor or a hydraulic / pneumatic cylinder. Casing and shell gates are of wear-resistant design for a long service life. Motorized flat gates of sturdy design complete the range of accessory equipment for material distribution.

In addition, AUMUND offers maintenance trolleys with rack and pinion drive to be installed inside conveyor bridges for transportation of heavy tools, oil bins or equipment components to the top of high clinker silos. The maintenance trolleys are designed to suit any angle of inclination.

The range of accessory equipment is completed by truck and ship loading systems with low dust generation and electronic control for easy loading operations.



Installation of new bucket strand

## CONVERSIONS AND REFURBISHMENTS

- **Upgrading of existing plant components**
- **Targeting increased efficiency**
- **Higher output**
- **Improved availability**

With our expert team of engineers planning selective modernisation measures, we pay special attention to the upgrading of existing plant components, targeting increased efficiency, higher output rates and improved availability.

Upgrading of your materials handling and storage equipment to state-of-the-art technology is achieved through a tailor-made refurbishment process under optimum utilisation of time and budget.

Most of the existing components are re-used in the refurbishment process to save cost.

Engineered conversions and refurbishments for increased efficiency and output are performed on AUMUND equipment as well as on the equipment of other manufacturers.



Pre-assembly of chain strands



## AFTER-SALES SERVICES

### • Customer Proximity around the World

At AUMUND, service does not end at the sale of the equipment. It's the beginning of a long-term partnership. AUMUND offers you a full range of services – from commissioning to the delivery of quality spare and wear parts to customized preventive maintenance programs and equipment upgrades. The benefits for you: Maximum equipment efficiency at lower operating costs.

### • Commissioning and Field Service

Today, presence “on the spot” is an absolute “must”. Therefore, our commissioning and service engineers operate from support centers on all continents to guarantee immediate and competent support.

### • Spare and Wear Parts

A comprehensive range of genuine spare parts is available for our entire product range from stocks in Germany, Great Britain and the USA. Our product specialists provide assistance and respond instantly.

### • Retrofits

Aged and worn equipment? Capacity increase needed? Too high operating cost? Aumund “just as new” retrofits are economical and tailor-made solutions for improving your existing equipment at reasonable cost.

### • Preventive Maintenance

Knowing beforehand that service will be needed allows you to schedule downtime and save money with timely repairs. Repairs or retrofits can be accurately anticipated allowing for the downtime to be at the most convenient times and at the lowest possible cost.



## THE AUMUND GROUP

### GERMANY

**AUMUND Fördererbau GmbH**  
Saalhofer Str. 17  
47495 Rheinberg  
Phone: +49 - 2843 - 72 0  
Fax: +49 - 2843 - 6 02 70  
e-mail: aumund@aumund.de  
www.aumund.com

**AUMUND Fördertechnik GmbH**  
Saalhofer Str. 17  
47495 Rheinberg  
Phone: +49 - 2843 - 72 0  
Fax: +49 - 2843 - 6 02 70  
e-mail: aumund@aumund.de  
www.aumund.com

**AUMUND Logistic GmbH**  
Saalhofer Str. 17  
47495 Rheinberg  
Phone: +49 - 2843 - 72 0  
Fax: +49 - 2843 - 72 47 3  
e-mail: logistic@aumund.de  
www.aumund.com

**SCHADE Lagertechnik GmbH**  
Dorstener Straße 360  
44653 Herne  
Phone: +49 - 2325 - 58 74 0  
Fax: +49 - 2325 - 58 74 74  
e-mail: info@schade-lagertechnik.de  
www.schade-lagertechnik.com

### GREAT BRITAIN

**B&W Mechanical Handling Ltd.**  
Gemini House Cambridgeshire  
Business Park, 1 Bartholomew's Walk  
Ely, Cambridgeshire CB7 4EA  
Phone: +44 - 1353 - 665 001  
Fax: +44 - 1353 - 666 734  
e-mail: sales@bwmech.co.uk  
www.bwmech.co.uk

### INDIA

**AUMUND Engineering Private Ltd.**  
2nd Floor, Lakshmi Neela Rite Choice  
Chambers - 9, Bazulla Road,  
T. Nagar Chennai - 600 017  
Phone: +91 - 44 - 4393 63 00  
Fax: +91 - 44 - 2815 60 46  
e-mail: aumund@vsnl.com

### RUSSIA

**AUMUND Representative Office Moscow**  
German-Russian House, Office 44  
ul. Malaja Pirogovskaja 5  
119435 Moscow / Russia  
Phone: +7 495 2879002  
Fax: +7 495 2879006  
e-mail: info@aumund.ru

### HONG KONG SAR

**AUMUND Asia (H.K.) Limited**  
Suite 1301, Oxford House,  
Taikoo Place, 979 King's Road,  
Quarry Bay  
Hong Kong  
Phone: +852 - 3695 - 43 33  
Fax: +852 - 3695 - 43 11  
e-mail: info@aumund-asia.com

### THE NETHERLANDS

**AUMUND Holding B.V.**  
Sporstraat 42-52  
59111 KJ Venlo  
Phone: +31 - 77 - 320 01 11  
Fax: +31 - 77 - 320 07 28  
e-mail: info@aumund-holding.nl

### SWITZERLAND

**AUMUND AG**  
Arther Str. 3  
6301 Zug  
Phone: +41 - 41 - 710 10 82  
Fax: +41 - 41 - 710 42 02  
e-mail: info@aumund.ch

### POLAND

**AUMUND Polska Representative Office**  
ul. Lektorska 34 G · 44-210 Rybnik  
Phone: +48 - 32 - 426 32 11  
Fax: +48 - 32 - 426 32 01  
e-mail: aumund@post.pl

### FRANCE

**AUMUND France S.A.R.L.**  
43, rue de Tréville · F 75009 Paris  
Phone: +33 - 1 - 42 46 72 72  
Fax: +33 - 1 - 42 46 72 74  
e-mail: aumund@aumund.fr

### BRAZIL

**AUMUND Ltda.**  
Rua Haddock Lobo, 337 - 11. andar  
01414-001 São Paulo, SP  
Phone: +55 - 11 - 3059 0160  
Fax: +55 - 11 - 3059 0161  
e-mail: aumund@aumund.com.br

### USA

**AUMUND Corporation**  
1825 Barrett Lakes Boulevard  
Barrett Lakes Center II  
Suite 520  
Kennesaw, GA 30144  
Phone: +1 - 770 - 226 - 95 78  
Fax: +1 - 770 - 953 - 48 44  
e-mail: sales@aumundusa.com

### P.R. CHINA

**AUMUND Machinery Trading (Beijing) Co. Ltd.**  
Rm. 7-8, 22-F, East Ocean Centre  
No. 24 Jianguomenwai Avenue  
Chaoyang District  
Beijing 100004  
Phone: +86 - 10 - 65 15 58 13 / 14  
Fax: +86 - 10 - 65 15 58 15  
e-mail: aumund@aumund.cn





AUMUND Headquarters in Rheinberg, Germany

## **AUMUND GROUP**

Your partner for all requirements regarding material handling and storage.

We design, engineer, manufacture, erect and service reliable equipment.

Reputation and competence proven by more than 10,000 installations in over 100 countries.

[www.aumund.com](http://www.aumund.com)

**AUMUND Foerdertechnik GmbH · Saalhoffer Str. 17 · 47495 Rheinberg (Germany)**

Tel.: +49 (0) 28 43-720 · Fax: +49 (0) 28 43-60270 · e-mail: [aumund@aumund.de](mailto:aumund@aumund.de)